

TOWN OF DAVIE

TOWN COUNCIL AGENDA REPORT

TO: Mayor and Councilmembers

FROM/PHONE: Bonnie Stafiej/797-1163 by Herb Hyman/797-1016

SUBJECT: Resolution

AFFECTED DISTRICT: District 2

TITLE OF AGENDA ITEM: A RESOLUTION OF THE TOWN OF DAVIE, FLORIDA, AUTHORIZING THE MAYOR TO EXECUTE CHANGE ORDER NUMBER 1 TO THE CONTRACT BETWEEN THE TOWN AND SOUTHEASTERN SEATING, INC. FOR THE REPLACEMENT OF BLEACHERS AT BERGERON RODEO GROUNDS.

REPORT IN BRIEF: The Town Council previously awarded a contract to Southeastern Seating, Inc. for replacement of bleachers at Bergeron Rodeo Grounds by Resolution R-2003-284. The budget for this project was \$120,000. At the time it was bid, staff believed that we could accomplish the replacement of the bleachers on the west side of the arena for this budget. Through the competitive bid process, the replacement of the west side of the arena was accomplished for \$89,975. The south west end of the arena has a section of bleachers that also needs replacement. This change order is to replace the south west end bleachers for \$29,875 which will still be within budget and complete the replacement of bleachers at the arena.

PREVIOUS ACTIONS: Contract awarded by Resolution R-2003-284

CONCURRENCES: The change order has been reviewed by the Special Projects Director and the Bid Specification Committee.

FISCAL IMPACT:

Has request been budgeted? Yes

If yes, expected cost: \$29,875.00

Account Name: Capital Improvement Program-Rodeo Arena Seating Account
030-3001-572-6878

Additional Comments: n/a

RECOMMENDATION(S): Motion to approve the resolution.

Attachment(s):

Change Order Number 1

RESOLUTION NO. _____

A RESOLUTION OF THE TOWN OF DAVIE, FLORIDA, AUTHORIZING THE MAYOR TO EXECUTE CHANGE ORDER NUMBER 1 TO THE CONTRACT BETWEEN THE TOWN AND SOUTHEASTERN SEATING, INC. FOR THE REPLACEMENT OF BLEACHERS AT BERGERON RODEO GROUNDS.

WHEREAS, the Town previously awarded a contract to Southeastern Seating, Inc. for bleachers at Bergeron Rodeo Grounds by Resolution R-2003-284; and

WHEREAS, the project budget had remaining funding available after replacing the bleachers on the west side of the arena; and

WHEREAS, the southwest section of bleachers needs to be replaced; and

WHEREAS, this change will facilitate completion of the project.

NOW, THEREFORE, BE IT RESOLVED BY THE TOWN COUNCIL OF THE TOWN OF DAVIE, FLORIDA:

SECTION 1. The Town Council hereby authorizes the Mayor to execute Change Order Number 1 which results in a net increase of \$29,875.00.

SECTION 2. The Town Council hereby authorizes the expenditure from the Capital Improvement Program-Rodeo Arena Seating Account 030-3001-572-6878.

SECTION 3. This resolution shall take effect immediately upon its passage and adoption.

PASSED AND ADOPTED ____ DAY OF _____, 2004


MAYOR/COUNCILMEMBER

Attest:

TOWN CLERK

APPROVED THIS ____ DAY OF _____, 2004

***Southeastern Seating Inc.....
Outdoor Bleachers & Grandstands***

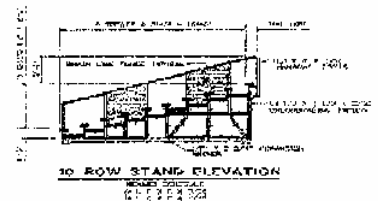

Quote from the desk of Jerry Freeman

Date; 5/26/04

**Town of Davie/ Rodeo Arena
6591 Orange Drive
Davie, FL 33314-3399
Phone 954-797-1163, Fax 954-797-2078
Attn; Bonnie Stafiej/ Special Projects Director**

General specifications non-elevated aluminum angle frame bleachers,

- 1. Bleachers to meet all State of Florida and N.F.P.A. 102 Safety Codes.**
- 2. All safety rails to be welded aluminum $\frac{3}{4}$ " vertical picket with a 1.66 aluminum pipe top and bottom cap.**
- 3. All hardware to be Hot- dipped Galvanized or Stainless Steel.**
- 4. All Endcaps to be welded to planking.**
- 5. Seat planks 2" x 10" Silver anodized**
- 6. Double 2" x 10" mill finish Floor Planks**
- 7. 1 x 6 aluminum riserboards mill finish**
- 8. Understructure to be manufactured using a series of 2" x 2" x 3/16", 2" x 3" x 3/16" and 1 1/2" x 1 1/2" x 3/16", 6061 T-6 welded structural aluminum angle that meets all State of Florida and N.F.P.A. 101 & 102 structural requirement.**
- 9. Rise & Run 8"/ 24"**

May 26, 2004
Page 2

2. Phase 2, South Side, End Zone

Angle Frame: Non-Elevated Bleachers;

Bleacher specifications;

2 set of 37'6", 15-row, Non-elevated aluminum angle frame bleachers, price includes, vertical aluminum picket safety rail system, mid-aisle rails, aisle extensions, aluminum end-caps, aluminum clip assemblies, hot-dipped galvanized hardware, concrete anchors, and delivery & installation, as on page A-14-03 & A-15-03 of the Workbook but 37'6" long.

Total gross seating 375 seats per unit

Cost per unit	14,587.50
----------------------	------------------

Proposed total bleacher cost;	29,175.00
--------------------------------------	------------------

Note;

<u>Removal of existing bleachers.</u>	<u>700.00</u>
--	----------------------

Total	29,875.00
--------------	------------------